



Installation Instructions
Retrofitting Set Fistune Antenna Module
Audi A5 8T Sportback
v1.0 (24.04.2017)

Contents

1	Liability Exclusion	3
2	Copy Right	4
3	General Notes	4
4	Safety instructions	5
5	Requirements for the determinable operation	5
6	How to connect a cable to another	6
7	Assembly instructions	7
8	Removing trim panel hatch	8
9	Installation antenna module	10
10	Removing trim panel at passenger's side	11
11	Cable routing	12

1 Liability Exclusion

Dear Customer

Our cable sets are developed according to the connection- and circuit diagrams of the corresponding car manufacturer. Before the original production the cable sets will be tested on an original car. Therefore, the integration into the car electronics will be executed according to the instructions of the manufacturer. Regarding the necessary pre-understanding and the accuracy of the presentation of texts and pictures our mounting guidelines correspond to the usual ones in car technology and car electronics. Practically, they have been proved one's worth a hundred times.

However, should there be any difficulties during the installation of our products we will be at your disposal any time for support by phone or by mail. Moreover, we offer you to execute the installation at our works in Bad Segeberg.

Costs which may arise because a third person will execute the installation of our products will not be supported by us in any case. Only if there is a mistake caused by our product we will pay the proved costs of the installation as well as the costs of the removal of the defective product. The refund of expenses will be limited to gross EUR 110,- ; we reserve the right to check the described mistake in our works in Bad Segeberg. In case of a proved reclamation the costs for dispatch for the check in our factory will be transferred to you.

According to our experience each specific factory which has the necessary diagnostic device, diagnostic software and the circuit diagrams of the manufacturer can find possible mistakes at our products within a short time. So the installation and removal including diagnostic inspection can be realised in at most 60 minutes.

We also made the experience that many specific factories cannot work with the circuit diagrams of the manufacturer, and that they cannot read usual wiring diagrams. Therefore, very easy installation works will take many hours. You will understand that we neither take the risk to find a reliable specific factory nor the financing of the training of the staff of your favoured factory.

Costs which will arise because you buy missing parts or spare parts at other suppliers will be refunded by us up to the amount of the costs which had been arisen by additional supply (saved expenses). In this case, there would be no right for refund according to the legal guarantee right as long as we have no deadline for supplementary performance or a deadline for supplementary performance has not expired.

So if you have any problems with the installation or operation of one of our products please call us, send us an email, send us the product or take your car to our factory in Bad Segeberg. We are sure to find an appropriate solution for each concern.

With best regards
Your Kufatec GmbH & Co. KG Team

2 Copy Right

Our installation- and removal instructions, installation plans, software and other documentation with texts or pictures are protected by copy right.

A publication or distribution of these documents is only permitted with a written approval of Kufatec GmbH & Co. KG.

3 General Notes

Regarding the development there has especially been paid attention to your personal safety together with the most possible operating comfort, modern design and actual product technologies.

Despite most possible accuracy in case of incorrect installation or use or in case of incorrect operating, it is possible that injuries or damages of property may arise.

Therefore, please read the operating instructions you have received carefully and completely, and keep it with you.

All articles of our production will be checked at 100% — for your safety.

We reserve the right to make technical changes which serve the progress at any time.

Before the installation or startup it may be necessary, depending on the article and purpose of use, to check the legal instructions of each country.

In case of warranty claim the device has to be sent to the seller originally packed together with the sales receipt and a detailed description of the mistake. Please consider the manufacturer's instructions for return (RMA). The legal warranty instructions are valid.

The warranty claim and also the permission for startup will expire in case of:

- unauthorised changes on the device or the accessories which have not been executed or approved by the manufacturer or its partners
- opening of the box
- repair of the device on your own
- incorrect use / no normal use / startup
- influence of force on the device (falling down, wilful damage, accident, etc.)

During the installation please consider all safety and legal instructions. The device may only be installed by trained qualified personnel or persons who are similar qualified.

In case of installation- or function problems please reduce the search of the mistake to approx. 0,5 hours for mechanical works or 1,0 hours for electronic works.

To avoid unnecessary additional work and expenses, please send immediately an inquiry to our technical support with the Kufatec contact form (<http://www.kufatec.de/shop/de/infocenter/>)

Please absolutely mention the following:

- car chassis number
- part number of the add-on kit
- exact description of the problem
- work steps already made

4 Safety instructions

The installation may only be executed by trained qualified personnel. Please execute the installations only in a condition of dead voltage. Here please separate for example the battery from the main power supply and consider the instructions of the car manufacturer.

- In order to not endanger your own driving safety please never use security relevant screws, bolts or other fixation pieces at steering, brake system or other components.
- Connect the device only at 12V wiring system voltage with ground connection to the autobody. This assembly is not allowed for the use in trucks or other cars with 24V wiring system voltage.
- Please avoid the installation of the device at positions where the driving safety or the functional efficiency of other subassembly integrated in the car are restricted.
- This module may only be used together with the following mentioned car types and models; the installation may be executed exclusively by use of the circuit points mentioned in the assembly instructions.
- Kufatec GmbH & Co. KG does not assume liability for damages which are caused by incorrect installation, the use of inapplicable circuit points or the installation into car types and -modules which are not foreseen.
- We would like to draw your attention to the fact that the module processes the data of the MOST-protocol of the car mentioned below. Therefore, during the installation of the module it will be used a model-specific complete system which we as the manufacturer of the mentioned construction line only know partly.
- Especially in case of changes within the same model line and the same year we therefore cannot guarantee the applicability of our construction line in each case. Kufatec GmbH & Co. KG does not assume liability for the applicability of our construction line with changes made by the manufacturer.
- Kufatec GmbH & Co. KG does not assume liability that the installation of the here described component has been permitted according to the guarantee instructions of particular car manufacturers. Therefore, please consider the guidelines for installation and guarantee conditions of your car manufacturer before installation.
- The manufacturer reserves the right to change components without giving reasons.
- Subject to errors and changes

5 Requirements for the determinable operation

Please use the device only in its the corresponding area.

In case of unprofessional and untypical use, installation or modification the permission for operation and the warranty claim will expire.

6 How to connect a cable to another

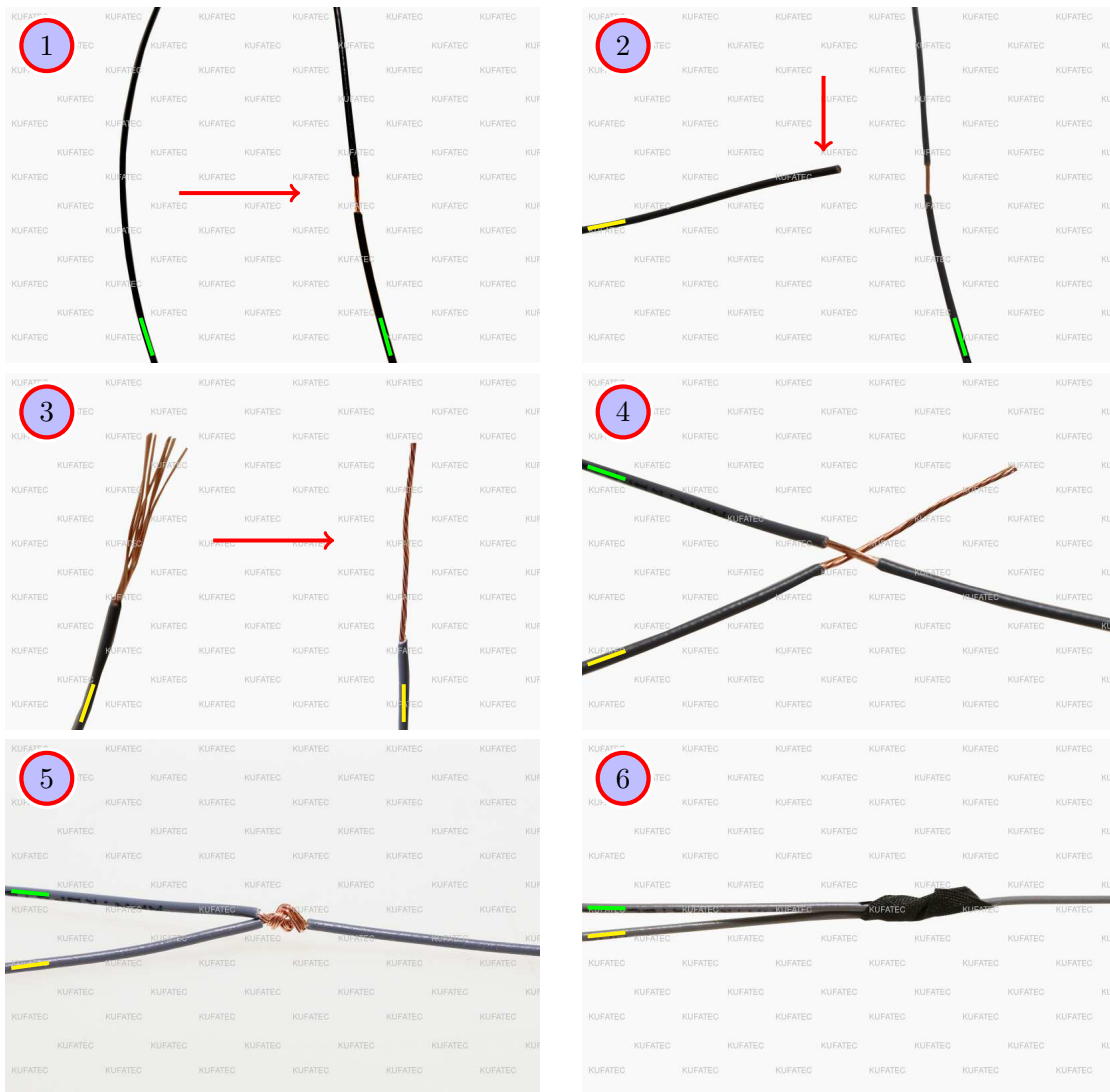


Figure 1: How to connect a cable to another

Table 1: How to connect a cable to another

No.	Work step	Note
1	Take the cable of the vehicle, to which you want to connect, (green marked here) and strip the insulation at one point with a suitable tool (cable stripper/cutter knife).	
2	Now take the cable of the cable set, which you want to connect, (yellow marked here) and strip the insulation at the end.	
3	Twirl the wires of the stripped cable together.	
4	Place the end of the cable you want to connect under the stripped point of the cable of the vehicle...	
5	... and wrap the cable you want to connect around the cable of the vehicle.	
6	Lastly, stick insulating tape around the connection point.	

7 Assembly instructions

The following illustration shows the cable routing as well as the position of the individual components.

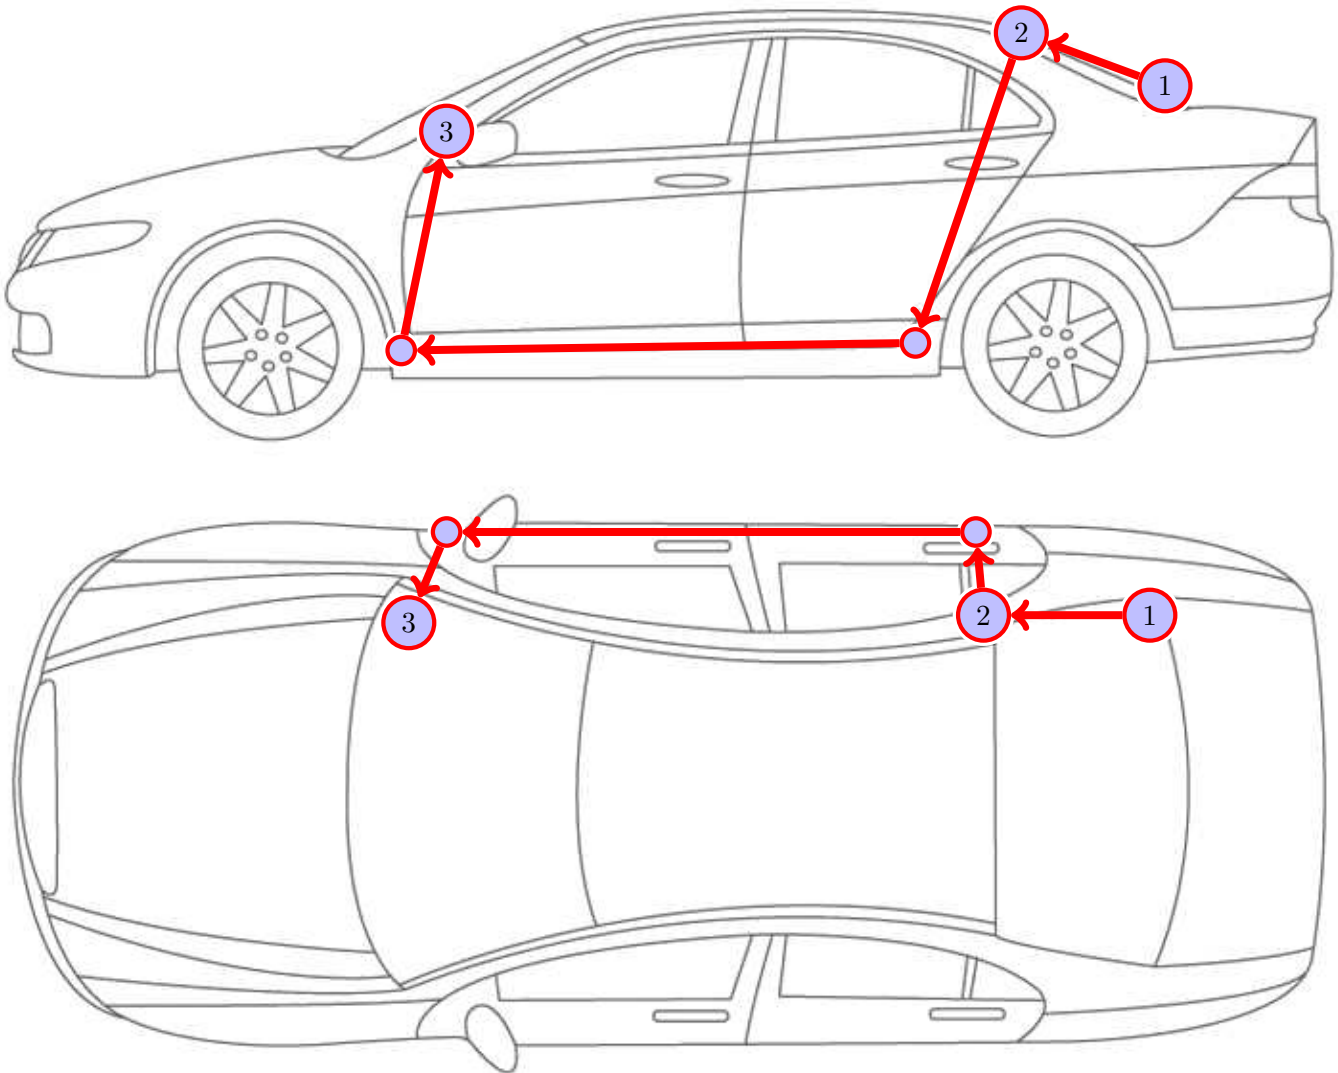


Figure 2: Vehicle overview

- 1 Antenna module
- 2 Connection cable assembly
- 3 Fistune unit

8 Removing trim panel hatch



Figure 3: Removing trim panel hatch

Table 2: Instructions for removing trim panel hatch

No.	Work step	Note
1	Please remove on the right and left side the coverings of the trim panel of the hatch by pulling them outwards.	
2	Remove the covering of the hatch locking by using a trim tool.	
3	Loosen the marked trunk lighting out of the covering.	
4	Remove the plug of the lighting and take this out of the covering.	

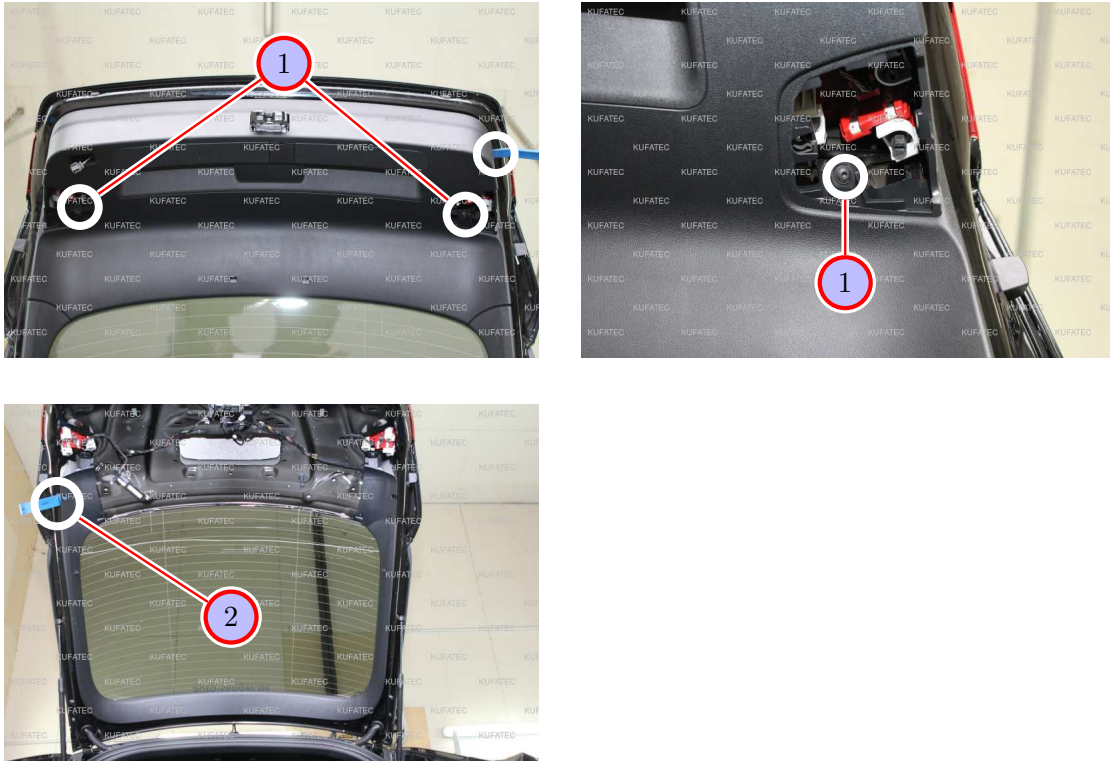


Figure 4: Removing trim panel hatch

Table 3: Instructions for removing trim panel hatch

No.	Work step	Note
1	Please loosen the marked screws and remove the lower trim panel of the hatch by using a trim tool.	
2	Loosen the trim panel of the hatch by using a trim tool and take it out afterwards.	

9 Installation antenna module

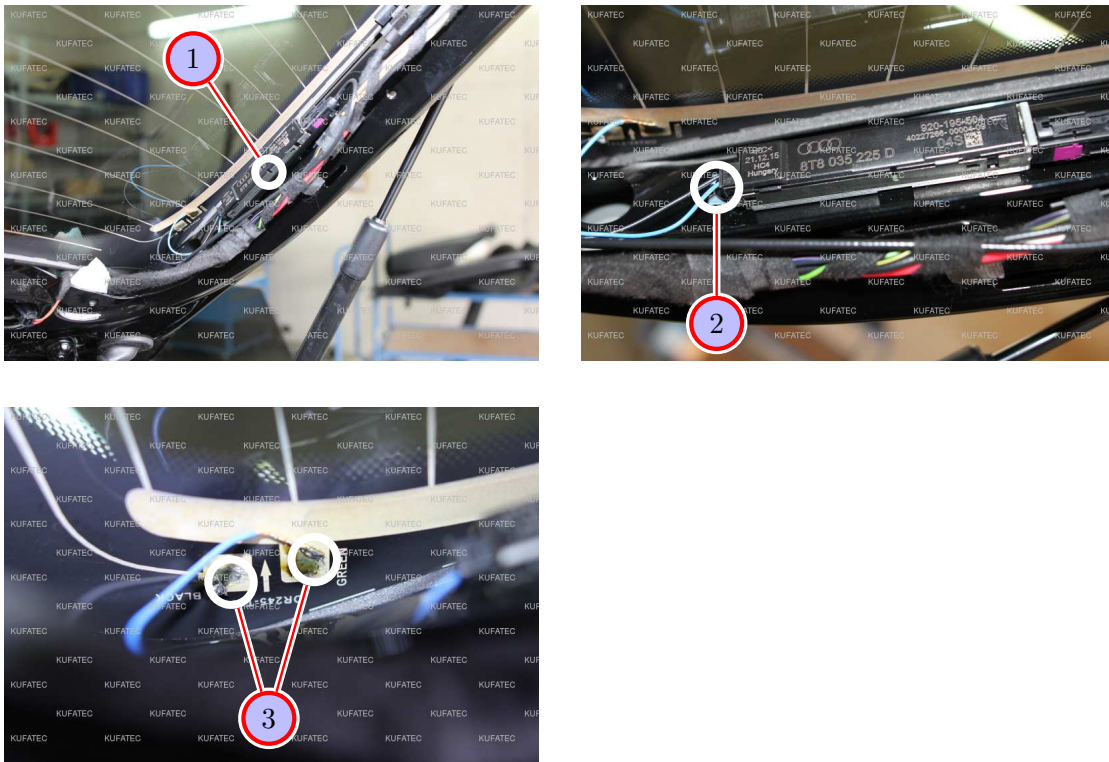


Figure 5: Installation antenna module

Table 4: Instructions for installation antenna module

No.	Work step	Note
1	Please insert the antenna module into the hatch at the marked position and fix it with a screw.	1xT20
2	Then connect the wires with the module.	
3	Afterwards please solder the wires at the rear window by soldering the black cable at the position marked black and the blue cable at the position marked green. It is advisable to grind the corresponding soldering points at bit before.	

10 Removing trim panel at passenger's side

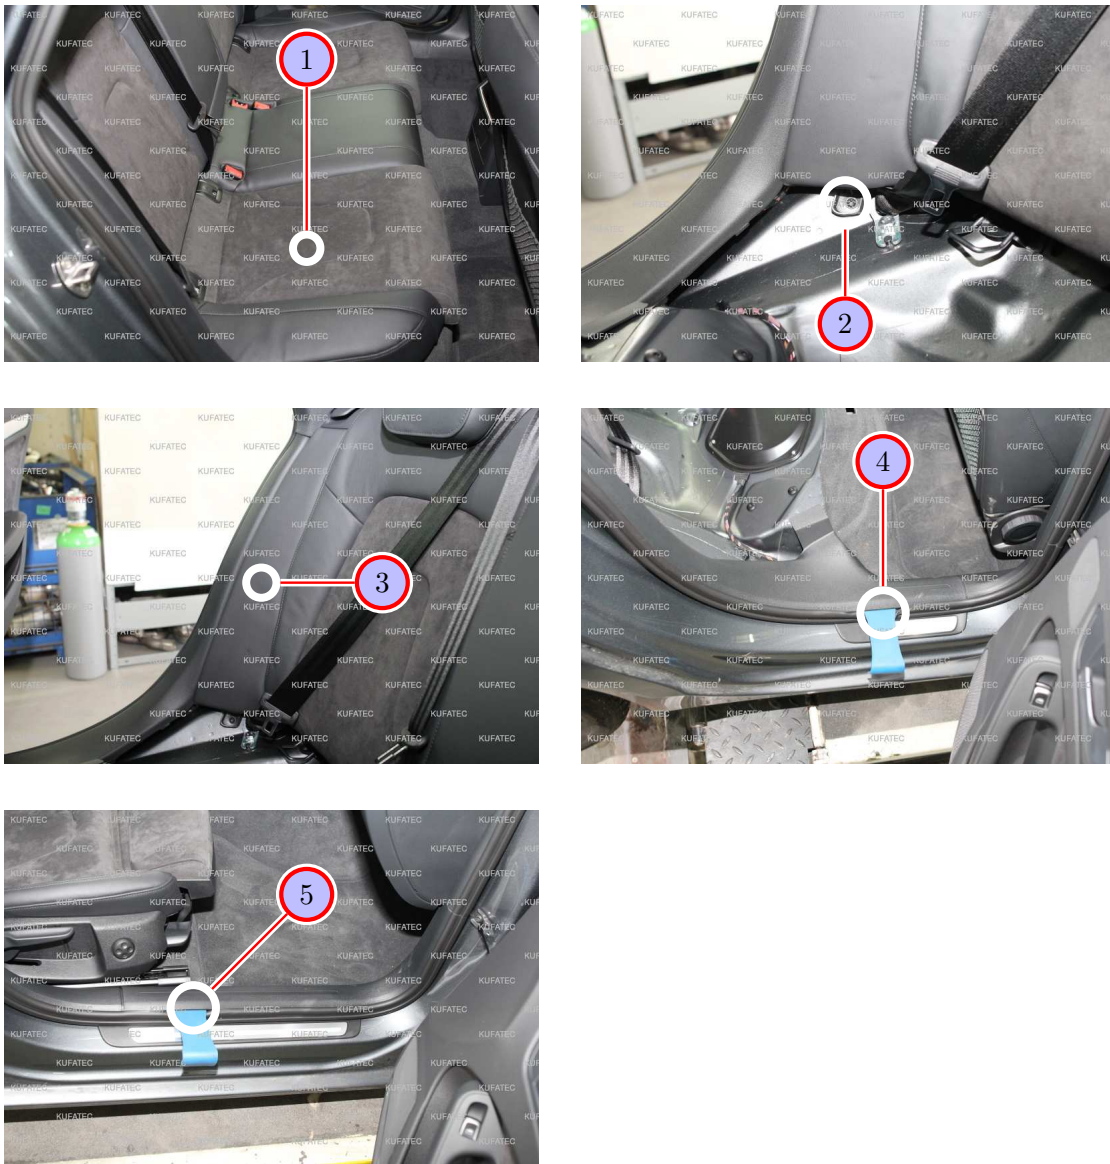


Figure 6: Removing trim panel at passenger's side

Table 5: Instructions for removing trim panel at passenger's side

No.	Work step	Note
1	Please take out the backseat by removing the ISO Fix holder and then pulling the backseat out of the holder upwards.	
2	Loosen the marked screw from the side bolster.	1x8er socket
3	Take the side bolster out of the vehicle.	
4	Loosen the back running board by using a trim tool.	
5	Loosen and remove the front running board by using a trim tool as well.	

11 Cable routing

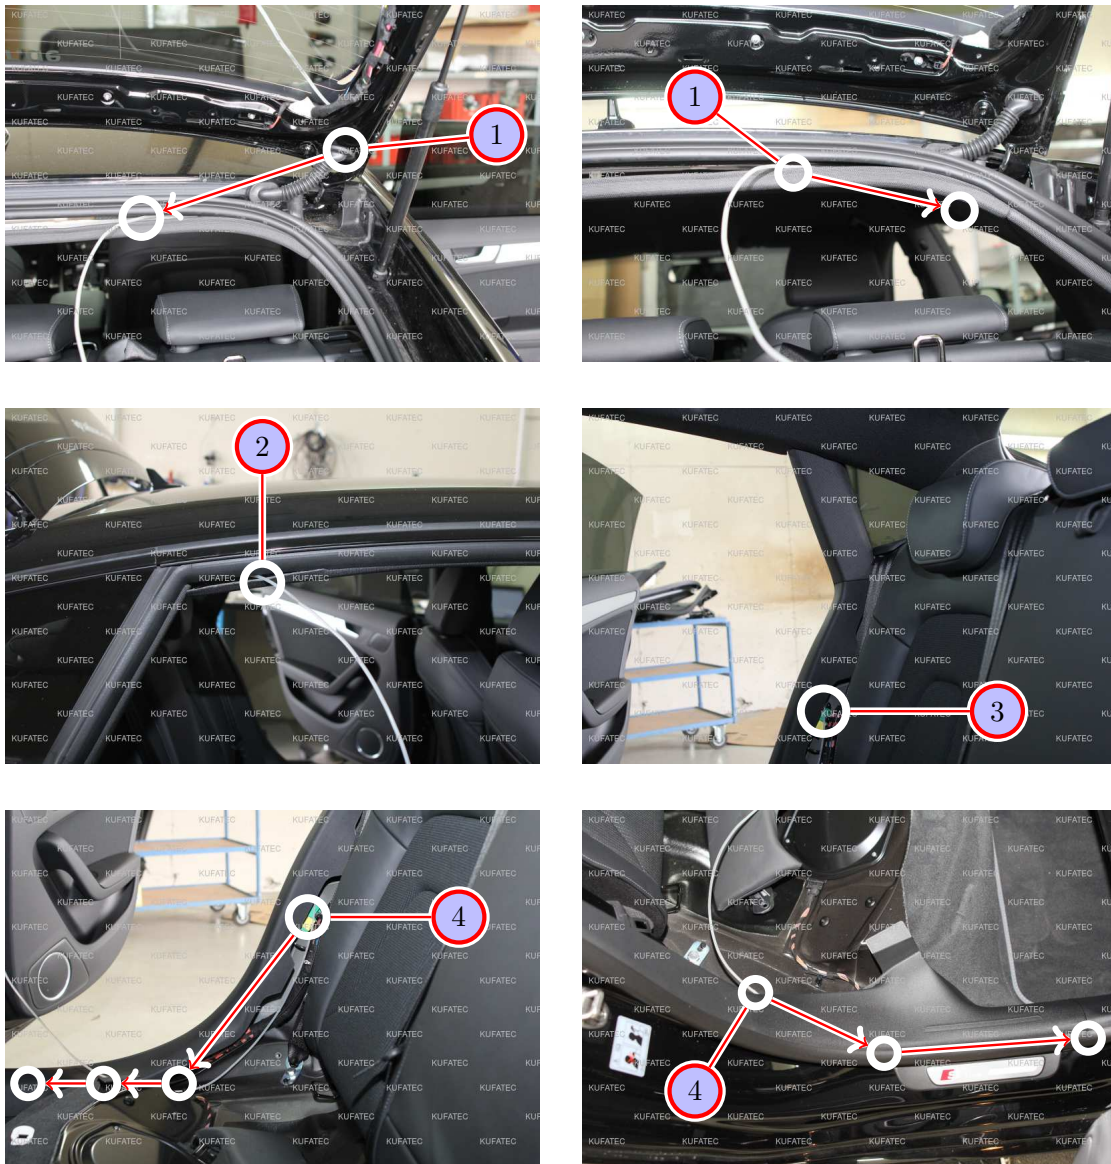


Figure 7: Cable routing

Table 6: Instructions for cable routing

No.	Work step	Note
1	Route the antenna cable through the rubber lip downwards to the ceiling.	
2	Please pull the cable behind the trim panel of the ceiling forward to the back door on passenger's side.	
3	Guide the cables behind the trim panel of the C-pillar upwards to the running board.	
4	Guide the cables along the running board forward to the B-pillar.	



Figure 8: Cable routing

Table 7: Instructions for cable routing

No.	Work step	Note
1	Pull the cable behind the trim panel of the B-pillar through and guide it along the running board forward to the trim panel of the A-pillar.	
2	Pull the cable behind the trim panel of the A-pillar through, then guide it to the Fistune and connect the cable afterwards.	

List of Figures

1	How to connect a cable to another	6
2	Vehicle overview	7
3	Removing trim panel hatch	8
4	Removing trim panel hatch	9
5	Installation antenna module	10
6	Removing trim panel at passenger's side	11
7	Cable routing	12
8	Cable routing	13

List of Tables

1	How to connect a cable to another	6
2	Instructions for removing trim panel hatch	8
3	Instructions for removing trim panel hatch	9
4	Instructions for installation antenna module	10
5	Instructions for removing trim panel at passenger's side	11
6	Instructions for cable routing	12
7	Instructions for cable routing	13